



TECHNICAL SPECIFICATION FOR: PUMP 0.8-3.9

OVERVIEW

- ✔ Portable and compact on base frame with castors
- ✔ Fitted with a 16A 3Ph 5pin flying plug as standard
- ✔ High delivery pressure



DESCRIPTION

Celsius Hire's PUMP 0.8-3.9 is an ancillary selected to complement the hire fleet and assist in providing more complete plant room rental solutions. These can be included as part of a hired package or even hired in separately if required.

Celsius Hire can assist you in the equipment selection, as this unit has a wide range, changing with the conditions of the specific application.

DATA

DESIGN FLUID FLOW	0.8L/S
DESIGN HEAD PRESSURE	3.9Bar
LENGTH	800mm
WIDTH	310mm
HEIGHT	550mm
WEIGHT	30KG
FULL LOAD AMPS	2A per phase
POWER CONNECTION	16A 3Ph 5pin Commando Plug
POWER TO MOTOR	Direct-online
FLUID COUPLING SIZE	25mm

CELSIUS HIRE

Call for your rental on:
0800 702 2161

Visit it us at:
www.celsiushire.com

Email us at:
info@celsiushire.com




All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.
All rights reserved.

Company No: 12763272

PUMP CURVE

MATRIX 3-5/0.75 (0.75 kW) - Impeller diameter = 98.5 mm
MATRIX 3-4/0.65 (0.65 kW) - Impeller diameter = 98.5 mm
MATRIX 3-3/0.65 (0.65 kW) - Impeller diameter = 98.5 mm
MATRIX 3-2/0.45 (0.45 kW) - Impeller diameter = 98.5 mm

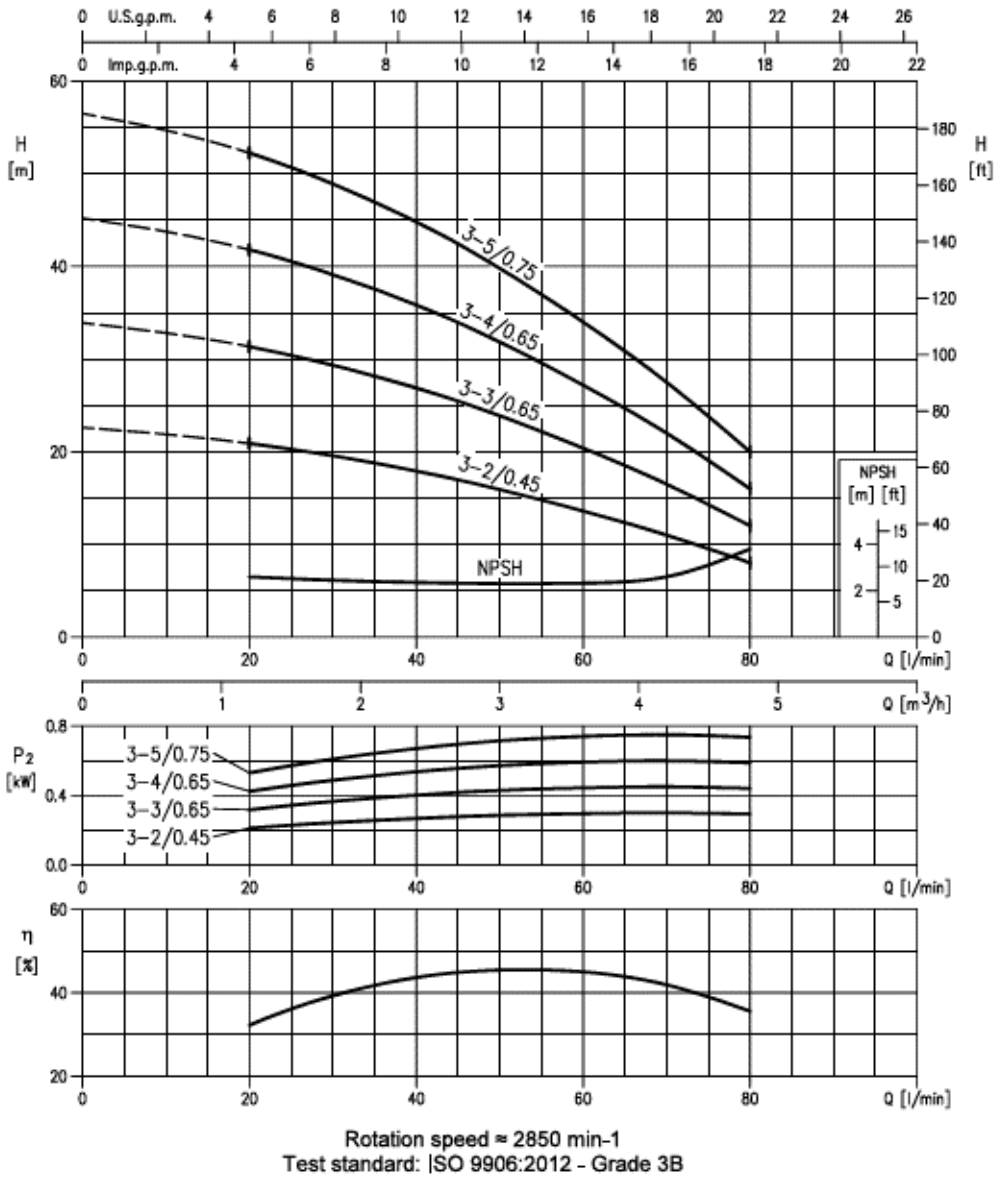

All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.
All rights reserved.

Company No: 12763272