



## TECHNICAL SPECIFICATION FOR: PUMP 0.8-4.6

### OVERVIEW

- ✔ Portable and compact on base frame with castors
- ✔ Fitted with a 16A 3Ph 5pin flying plug as standard
- ✔ High delivery pressure



### DESCRIPTION

Celsius Hire's PUMP 0.8-4.6 is an ancillary selected to complement the hire fleet and assist in providing more complete plant room rental solutions. These can be included as part of a hired package or even hired in separately if required.

Celsius Hire can assist you in the equipment selection, as this unit has a wide range, changing with the conditions of the specific application.

### DATA

DESIGN FLUID FLOW	0.8L/S
DESIGN HEAD PRESSURE	4.6bar
LENGTH	800mm
WIDTH	310mm
HEIGHT	550mm
WEIGHT	30KG
FULL LOAD AMPS	2A per phase
POWER CONNECTION	16A 3Ph 5pin Commando Plug
POWER TO MOTOR	Direct-online
FLUID COUPLING SIZE	25mm

CELSIUS HIRE

Call for your rental on:  
0800 702 2161

Visit it us at:  
[www.celsiushire.com](http://www.celsiushire.com)

Email us at:  
[info@celsiushire.com](mailto:info@celsiushire.com)




All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.  
All rights reserved.

Company No: 12763272

PUMP CURVE

Power data referred to:  
Water, pure [100%] ; 4°C; 1000 kg/m<sup>3</sup>; 1.57 mm<sup>3</sup>/s  
Performance according to ISO 9906:2012 – Grade 3B

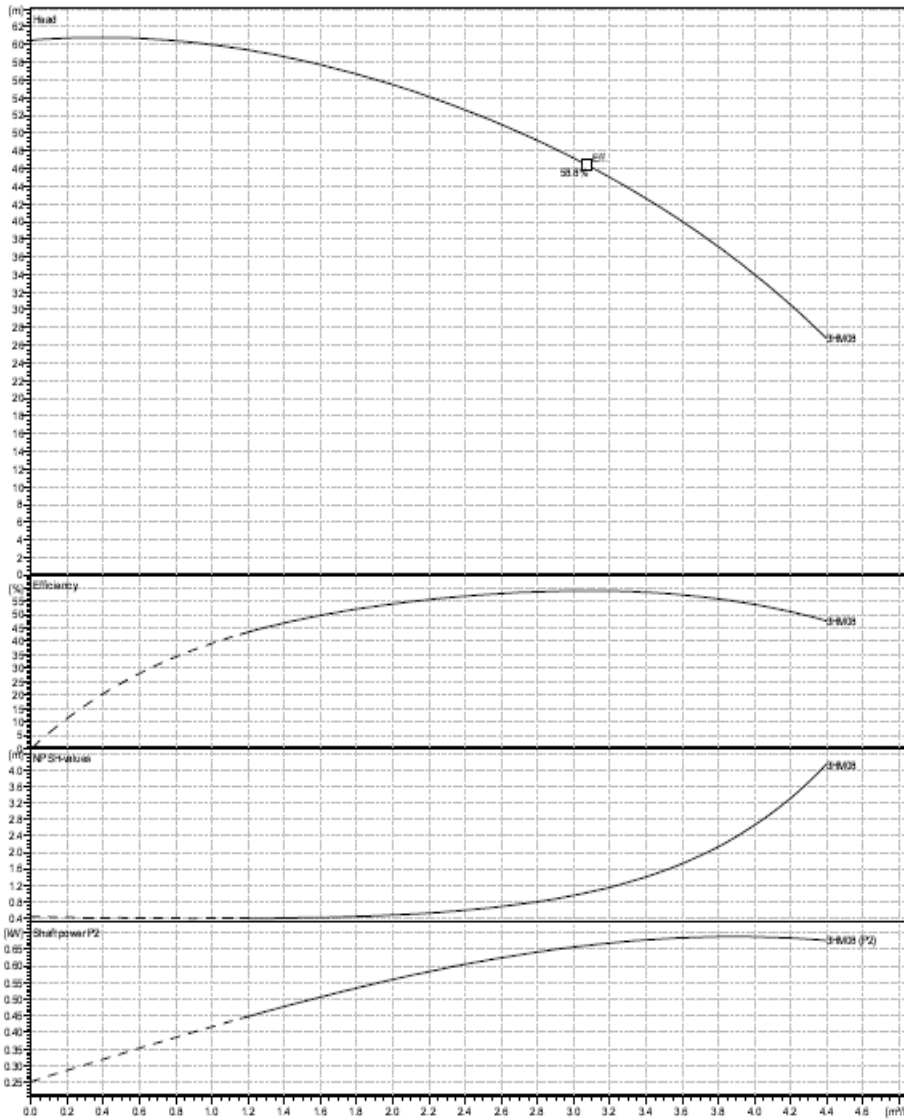

All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.  
All rights reserved.

Company No: 12763272