



TECHNICAL SPECIFICATION FOR:

## PUMP 9.8-2.9

---

### OVERVIEW

- ✔ Portable and compact on base frame with castors
- ✔ Fitted with a 16A 3Ph 5pin flying plug as standard
- ✔ High delivery pressure



### DESCRIPTION

Celsius Hire's PUMP 9.8-2.9 is an ancillary selected to complement the hire fleet and assist in providing more complete plant room rental solutions. These can be included as part of a hired package or even hired in separately if required.

Celsius Hire can assist you in the equipment selection, as this unit has a wide range, changing with the conditions of the specific application.

CELSIUS HIRE

Call for your rental on:  
**0800 702 2161**

Visit it us at:  
[www.celsiushire.com](http://www.celsiushire.com)

Email us at:  
[info@celsiushire.com](mailto:info@celsiushire.com)



All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives


**DATA**

DESIGN FLUID FLOW	9.8L/S
DESIGN HEAD PRESSURE	2.9Bar
LENGTH	1050mm
WIDTH	310mm
HEIGHT	650mm
WEIGHT	50KG
FULL LOAD AMPS	8A
POWER CONNECTION	16A 3Ph 5pin Commando Plug
POWER TO MOTOR	Direct-online
FLUID COUPLING SIZE	50mm

**PUMP CURVE**

Test standard: ISO 9906:2012 - Grade3B

Water, clean [100%] ; 293K; 998.3kg/m<sup>3</sup>; 1mm<sup>2</sup>/s

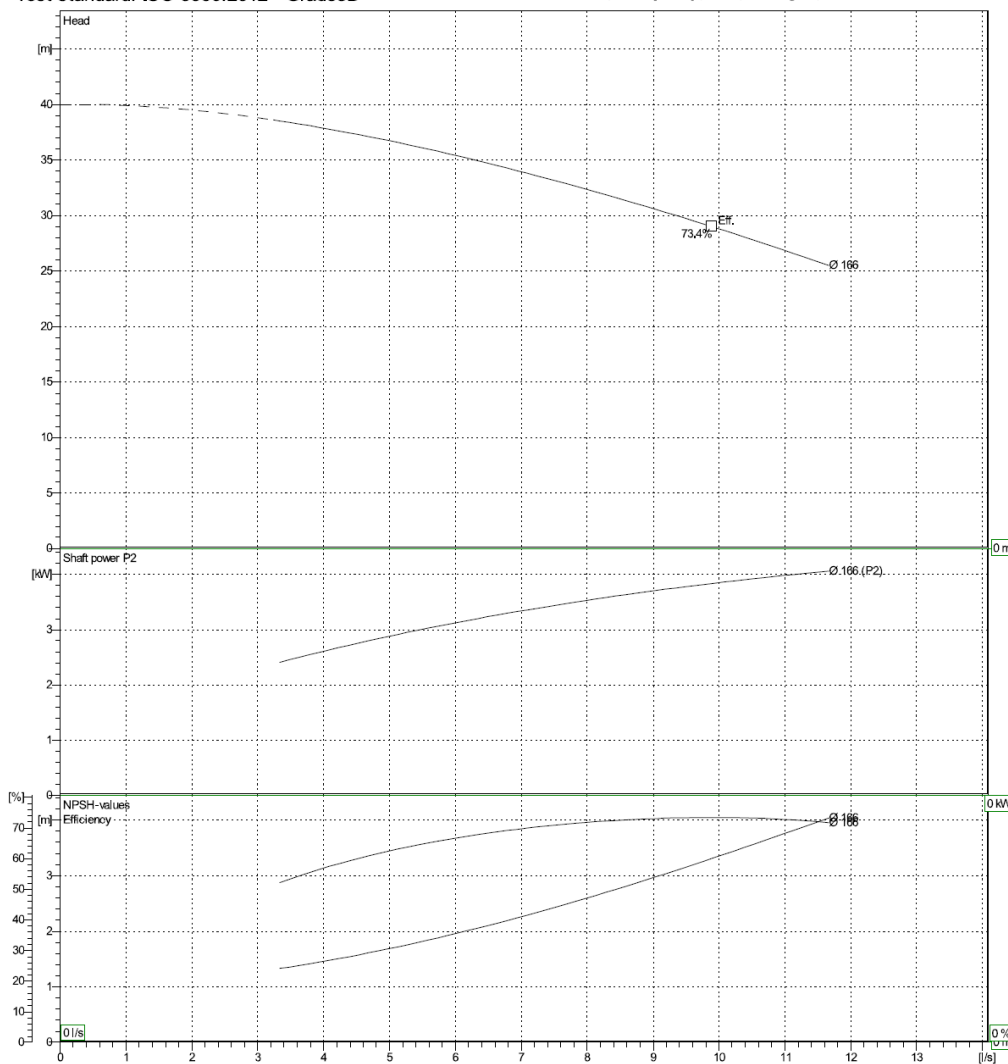

All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives